


## Specification



Anticollision , Waterproof, Dustproof

**RoHS**  
Compliant

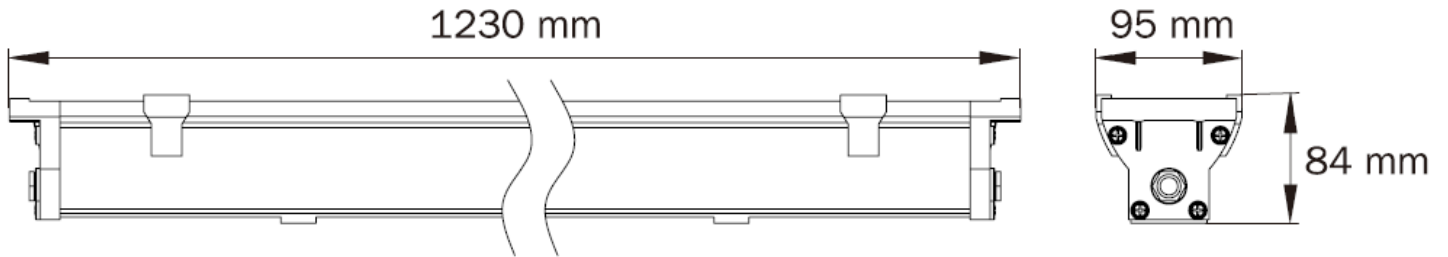

**IP65**



50,000 hrs



## Explosion-proof LED Light

80%-90% energy saving, reduced carbon dioxide release.

No need annual maintenance and replacement.

No UV Rays,with fresh touch.

No risk of burns:Low current, can reach the highest electrical safety standards.



Specification:


80LEDs 90W

## Specification

Model name: SS-TP-1230\*95mm-80P-HP-90W


Model No.	Power	Voltage	Color Temperature	Lumen Output	Beam Angle	Life Time	Weight
SS-TP-1230*95mm-80P-HP-90W	90W	AC90~240V	3000K/4000K/5000K/6000K	8000Lm	135°	50,000	4KG

### Technical information:

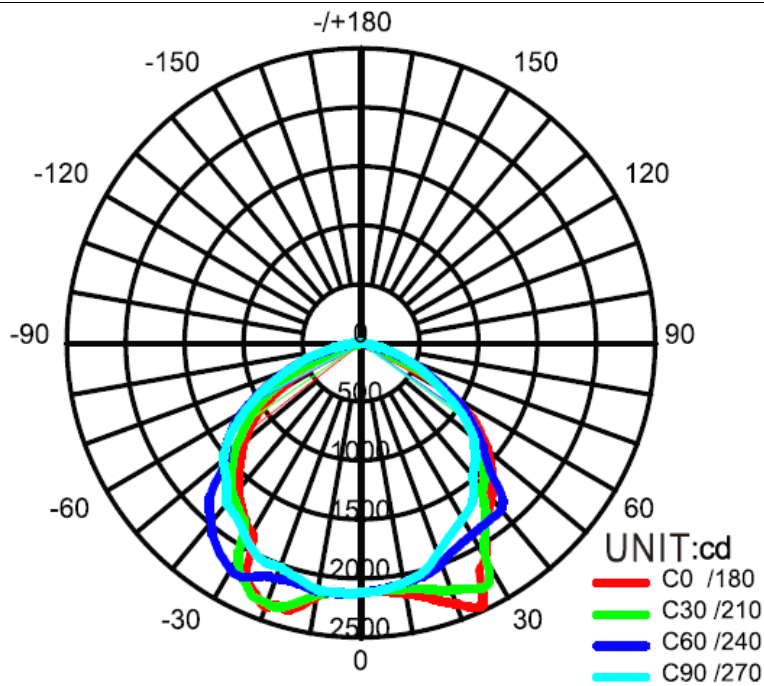

AVERAGE BEAM ANGLE(50%): 105 DEG

## Specification

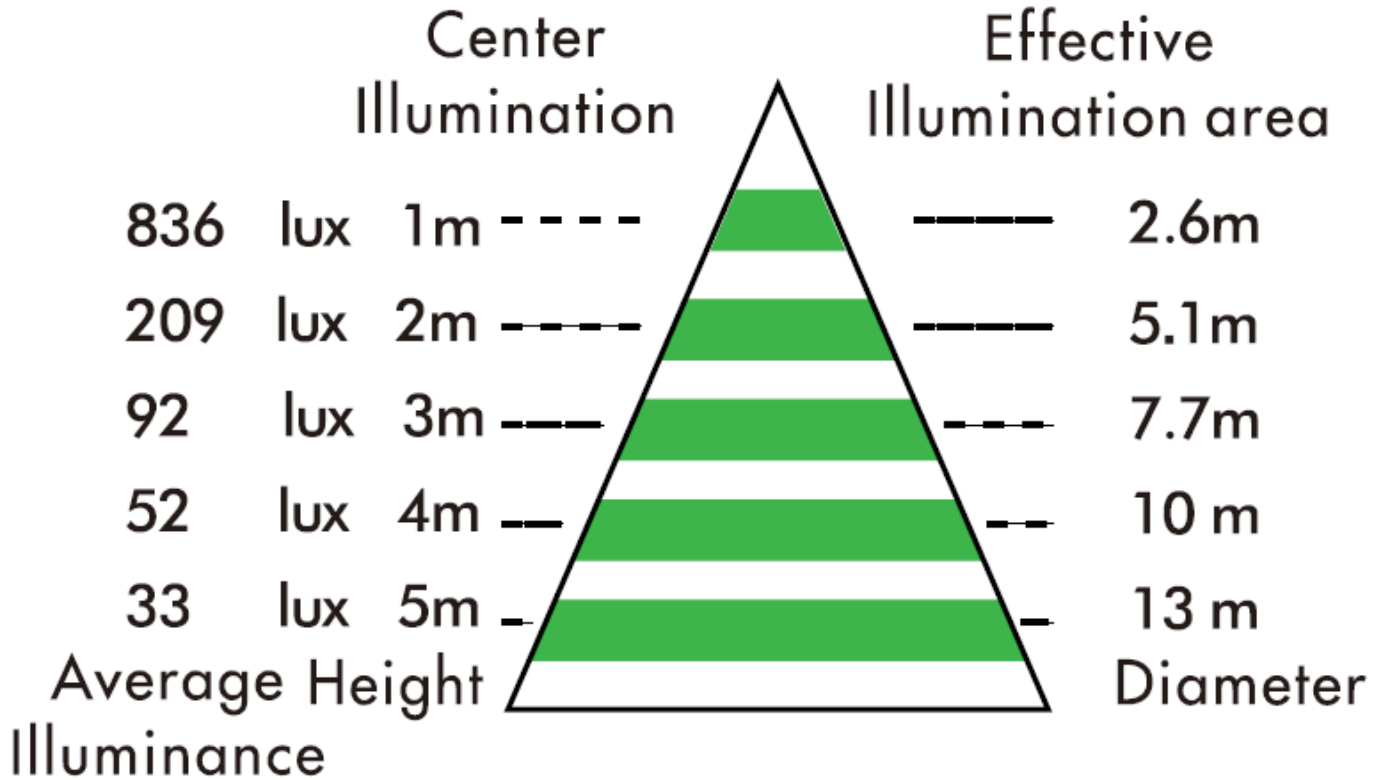

### Application:

Icehouse, Industry, etc



## Specification



**IP65**



50,000 hrs



## Comparasion

Model : SS-TP-1230\*95mm-80P-HP-90W(Up statistics) Compare with Traditional Explosion proof light contrast (Down statistics)

CRI	Efficacy (lm/w)	LLD (3000H)	Voltage (V)	Flash	Pro-environment	Environment Adaptability	Life (H)	Power (W)	Flux (lm)	power Consumpition /day (24H)	save energy /year
≥90	90	3%	90-240	None	None-Pollute	Maintenance Free/ Anti-seismic/ Lower working Temperature/ Soft and uniform light, without glare	50000	90	8000	2.16Degree	473Degree
≥70	45	30%	Below the rated voltage will turn off the lights	100 To 120 times Per Second	Pollute		6000	180	8000	4.32Degree	

Model : SS-TP-1230\*95mm-80P-HP-90W(Up statistics) Compare with similar product on the market (Down statistics)

Temperature	PF	Total Harmonic	Certificate
-30 To 50 Degree	≥0.92	≤20%	CE&RoHS
-20 To 40 Degree	≈0.8	40%	None