

OB-HB-250W(also make 180-260W)(Size:521,410mm)

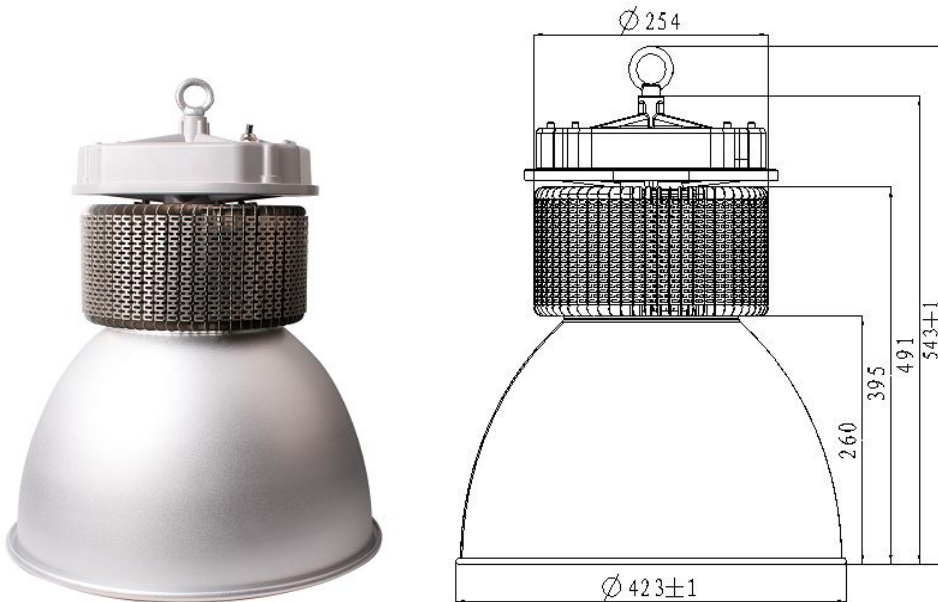

Key feature:

Use AL 1070 Cooling fin heat sink, excellent heat dissipation

16 Inch aluminum reflector/PC reflector, >93% transparency protection PC cover.

Constant current design, big heat dissipation space to ensure LED lighting efficiency and life span



We can provide 60° 120° for 16 Inch aluminum reflector and 60° PC reflector.

Specification

Specification:


category:	parameter
Base	N/A
Power	250±5W
Input Voltage	85V-265Vac/50Hz
light type	4*60W COB
Dimension	Φ521*410mm
service life	50000h
Water Class	IP20
weight	≈5KG
Beam Angle	60°±2°
POWER FACTOR	0.9
SURFACE TEMPERATURE:	<70°C
SAFETY ASSURANCE	
Inner box	320*320*320mm
QTY/Carton	4PCS/Carton
20pcs Aluminum cover size:	S:455*455*580mm
Gross Weight:	19KG
Export carton	655*340*680mm
20pcs Aluminum cover gross weight	10.5KG
CCT	2700-3700K WW 3700-5000K NW 5000-7000K CW
CRI:	≥70
Luminous	21400±5%lm 21581±5%lm 22040±5%lm

Technical information:

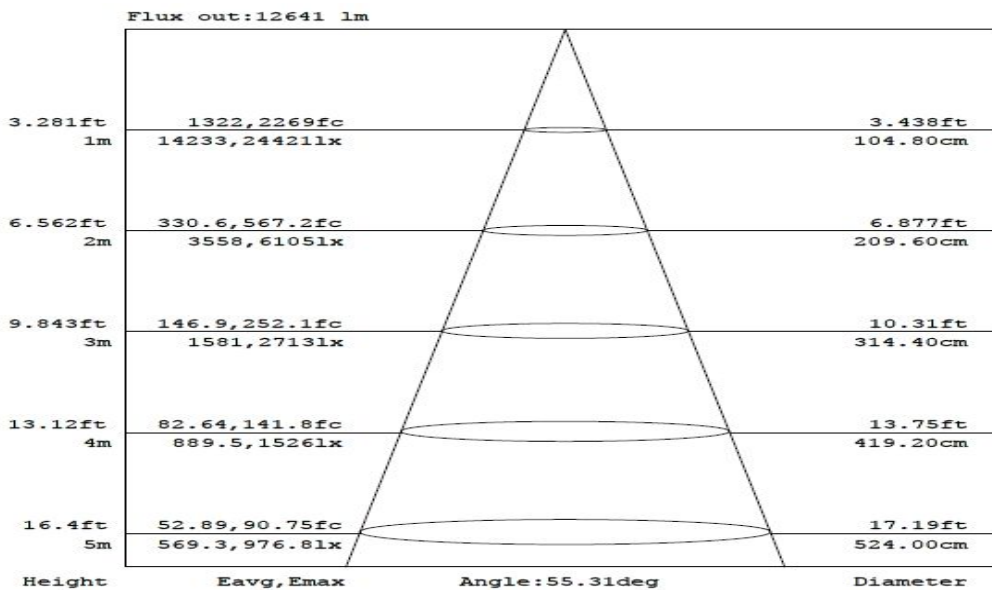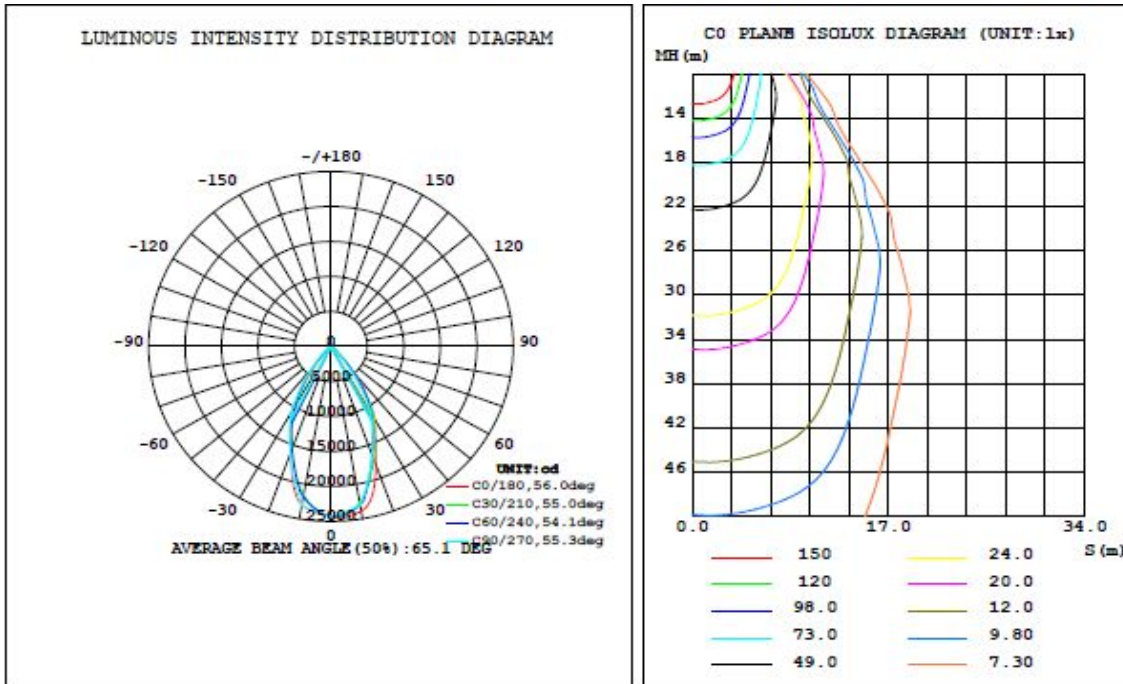

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Specification

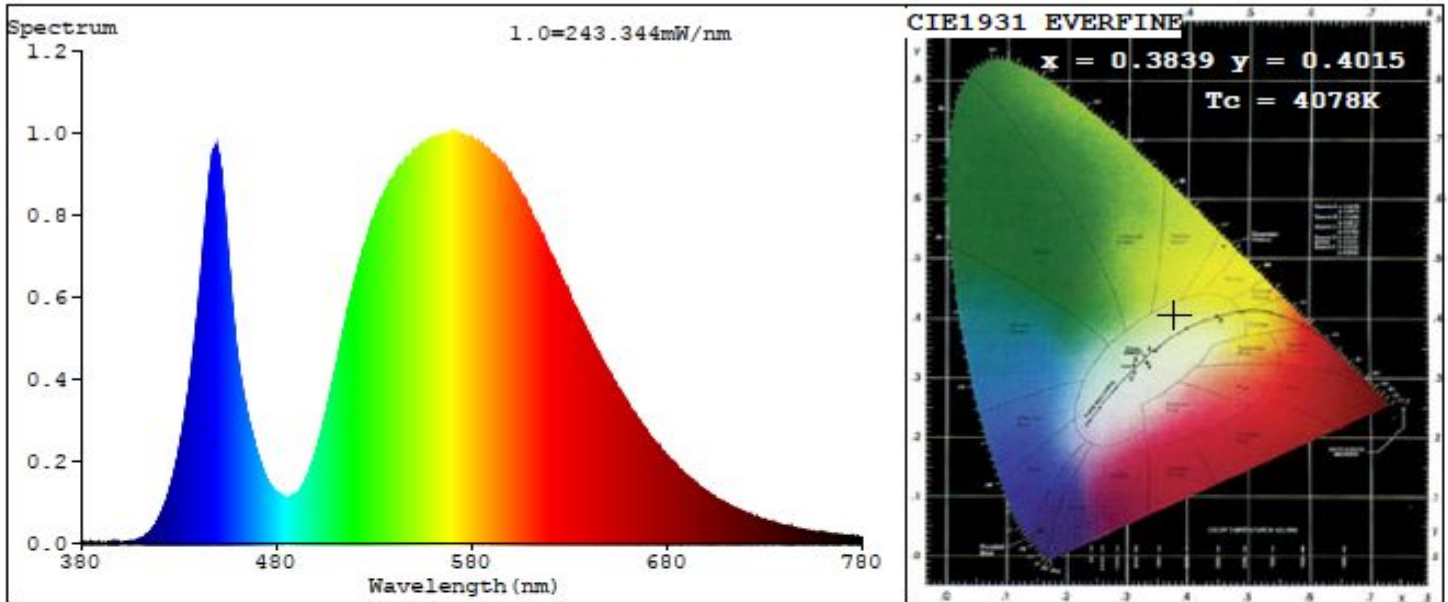

Color Parameters:

Chromaticity Coordinate: $x=0.3839$ $y=0.4015$ $u'=0.2178$ $v'=0.5125$

$T_c=4078K$ (Duv=0.0102) Dominant WL:Ld =574.4nm Purity=35.7%

Ratio:R=16.9% G=81.3% B=1.9% Peak WL:Lp=570.6nm HWL:Lhd=127.5nm

Render Index:Ra=71.2

R1 =64	R2 =74	R3 =71	R4 =67	R5 =73	R6 =62	R7 =72	
R8 =51	R9 =0	R10=37	R11=60	R12=28	R13=65	R14=79	R15=57

Photo Parameters:

Flux = 21230 lm Eff. : 80.24 lm/W $F_e = 38.89$ W

Electrical parameters:

V = 220.6 V I = 1.213 A P = 262.8 W PF = 0.9819

LEVEL:OUT WHITE:OUT

Status: Integral T = 235 ms $I_p = 55475$ (85%)

Outback

Lighting Technology Limited

Prismtech LED Outback Light Limited

Specification

Application:

Suitable for Warehouses, Production and logistics workshops, Retail stores, Theme restaurants, Amusement parks, Indoor stadiums and public places, and other industrial and commercial lighting purposes.

