


# Lighting Technology Limited Prismtech LED Outback Light Limited

### **Specification**

**OB-ST-RT-80W** 

## ARCHITECTURAL DESIGN LED HIGHMAST LIGHTING



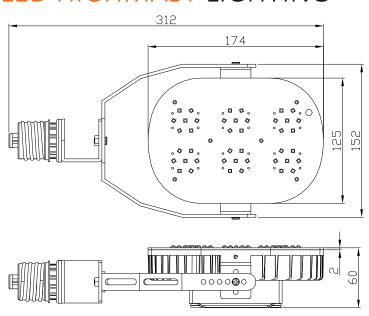







#### **Features:**

- CE UL RoHS certificate
- High CRI
- Warm / Natural / Cool / Cold white
- Mean Well external driver, input voltage AC100-277V
- Can be with 15°, 30°, 45°, 60°, 75° and 90° lens
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long service life
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury



# Lighting Technology Limited Prismtech LED Outback Light Limited Specification

### Specification:

Model No.	OB-ST-RT-80W
Power	80W
Chip pcs	42pcs
Input Voltage	AC100-277V 50/60Hz
Luminous Flux	7600LM-8160LM /95LM/W-105LM/W
Color Temperature	2700-3000K/4000-4250K/6000-6500K/7000-8000K
CRI	Ra>70Ra
Operating Humidity	20%-90% RH
Working Life	>50000 hours
Working Temperature	-20°C TO 45°C
Storage Temperature	-30°C TO 80°C
Protection Level	IP40
Casing material	Aluminum
Net Weight	1.6Kg
Dimension	312*152*60mm
Beam Angle	120 Degree
Driver	MW-CEN-100-24
PFC	>0.9
Chip Brand	CREE XTE,1-5W
Housing	Housing color
Housing color	Gray
warranty	3 Years
Equivalent	500W incandescent / 160W CFL




# Lighting Technology Limited Prismtech LED Outback Light Limited


## **Specification**




Light Distribution Curve:


DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	2964	S/MH (CO/180)	1.22
NOMINAL POWER(W)	82	EFFICIENCY(%)	80.5	S/MH (C90/270)	1.31
RATED VOLTAGE (V)	220	TOTAL FLUX(lm)	8420	Voltage (V)	219.6
NOMINAL FLUX(lm)	8420	EFFICIENCY (lm/W)	104.0	Current (A)	0.380
LAMPS QUANTITY	1	η υρ(%)	0.0	Power (W)	81.22
TEST VOLTAGE (V)	219.6	η down(%)	80.5	Power Factor (PF)	0.971







22.00



150.0



## Lighting Technology Limited Prismtech LED Outback Light Limited Specification

### Package:

#### Lamps Net Weight: 1.6Kg

	Size	Qty/ Carton	Weight/ Carton
inner box	292*256*122mm	1	2.1kg
outer box	525*305*298mm	4	9.0kg



#### Caution:

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

#### Installation&Application:

- 1. Outdoor basketball court; tennis court
- 2. Badminton court ;the football field
- 3. The school playground ;stadium
- 4. Community leisure entertainment plaza; road lamp etc.

